





NOTE:

Spillway depth "d" shall be maintained to prevent flanking of concentrated flow around the ends of each check dam.

SECTION TEMPORARY CHECK DAM (TYPE 2)

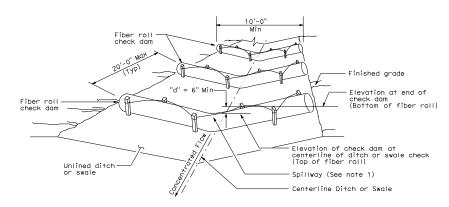

<u>PERSPECTIVE</u> TEMPORARY CHECK DAM (TYPE 1) (Total of 3 check dams shown)

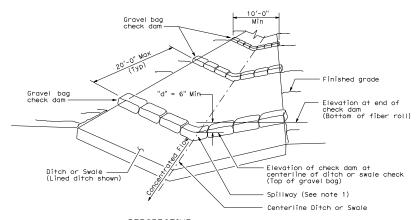

PERSPECTIVE TEMPORARY CHECK DAM (TYPE 2)

(Total of 3 check dams shown) STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

> **TEMPORARY WATER POLLUTION CONTROL DETAILS** (TEMPORARY CHECK DAM)

> > NO SCALE

T57